

PROJECT:

TYPE:

QUANTITY:

AGENT:

DATE:

LEADING THROUGH PERFORMANCE

Rev: 1201


Copyright © 2010 Affineon Lighting

ARCHITECTURAL & COMMERCIAL SOLID STATE LIGHTING


MINI DOWNLIGHT



MINI DOWNLIGHT

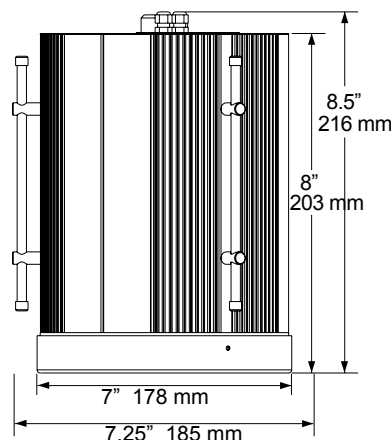

SIDE VIEW

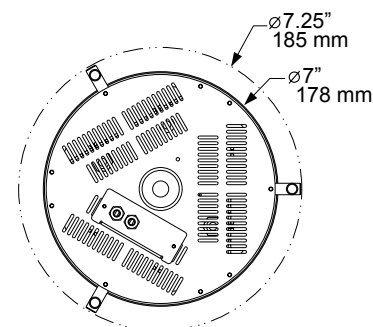

TOP VIEW

DESCRIPTION

Affineon's Decorative Downlight Mini Series is a robust designer downlight fixture intended to replace incandescent and metal halide lamps in convention, arena, theater, retail, office interiors, church, and other high ceiling atrium applications. Affineon's decorative fixture has a brushed aluminum anodized finish, and features a cylindrical extruded aluminum housing that provides physical and thermal component protection. The power supply is integrated with a standard DMX dimming interface. The LED's are recessed 1.5" into the can for indirect light cut off. Optional mounting systems available.

SPECIFICATIONS

| | | | |
|---------------------|--|--------------------|---|
| MATERIALS: | Anodized aluminum alloy, Stainless steel hardware. | DIMMING: | DMX (Std). None or 0-10 VAC optional |
| LAMP LIFE: | 70% lumen maintenance at 60,000 hours, 25C | DIMENSIONS: | 7.25" diameter, 8.5" high |
| POWER: | DLM-150 31W / DLM-250 45W | MOUNTING: | Ceiling pendant mount (Std) Wall and Yoke mount optional |
| VOLTAGE: | Universal 100 - 277VAC with standard 24VDC output | FINISH: | Silver Anodized Aluminum Alloy (Std) Optional finishes available |
| COLOR TEMP: | Warm White 3000K / Neutral White 4000K / Cool White 5000K / 90+ CRI 3000K | WEIGHT: | 10 lbs |
| BEAM ANGLES: | 12° / 50° / 120° | WARRANTY: | 5 years limited parts |

CERTIFICATIONS



ORDERING LOGIC (EXAMPLE: DLM - 150 - U - CW - 120 - DMX - W - S)

| MODEL | LED ENGINE | VOLTAGE | COLOR TEMP | BEAM ANGLE | DIMMING | MOUNTING | FINISH | ACCESSORIES |
|------------------------------|----------------------------------|------------------------------------|--|---|---|--|-----------------------------------|---|
| DLM | - | - | U | - | - | - | - | <input type="checkbox"/> Tempered Glass |
| Decorative Downlight Fixture | 150 31W 250 45W | 100-277 VAC Universal Power Supply | WW 3000K NW 4000K CW 5000K SP3 90+CRI 3000K | 12 12° 50 50° 120 120° | DMX DMX N None V 0-10V | P Pendant Mount (Std) W Wall Mount Y Yoke Mount | S Silver B Black | <input type="checkbox"/> Poly-carbonate <input type="checkbox"/> Frosted Acrylic <input type="checkbox"/> Baffles (3) |