


PROJECT:	
TYPE:	QUANTITY:
AGENT:	DATE:
Rev: 120310	
Copyright © 2010 Affineon Lighting	

ARCHITECTURAL & COMMERCIAL SOLID STATE LIGHTING

FS-MAX



YOKE MOUNT - 180° SWIVEL

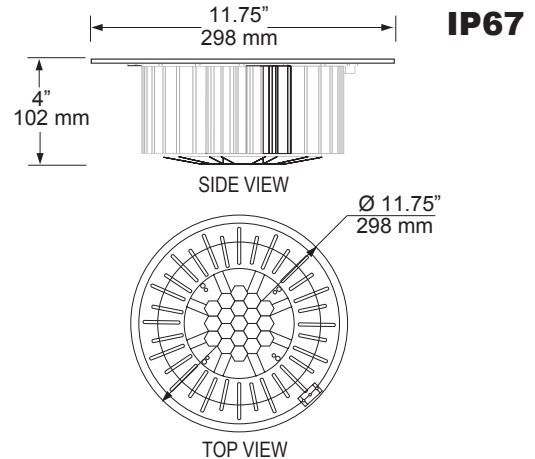

DESCRIPTION

Affineon's FS-MAX fixture is designed for retrofit or new construction with optional enclosure mounting, and, with a 12° optic it will produce a conspicuous beam up to 100 ft. Other optical choices are ideal for closer and wider applications. With an IP rating of 67, it is ideally suited for interior or exterior applications such as landscape and architectural uplighting. Top and bottom plates of hard anodized aluminum alloy, stainless steel hardware and hail resistant borofloat glass produce an extremely durable, completely sealed fixture. Affineon's FS-MAX has a simple design that allows for easy installation. Yoke mount boasts a 180 degree swivel adjustment.

SPECIFICATIONS

MATERIALS:	Top and bottom plates are hard anodized aluminum. Borofloat glass lens cover. Stainless steel hardware.	BEAM ANGLES:	12° / 50° / 120° / Custom 12° to 30° wall wash
LAMP LIFE:	70% lumen maintenance at 60,000 hours, 25C	DIMMING:	Optional DMX dimmable interface available
IP RATING:	IP67	DIMENSIONS:	11.75" dia. x 4" deep
POWER:	FS-MAX 21.6W (White, RGB)	MOUNTING:	In-grade (Std) or Yoke Mount w/180° swivel
VOLTAGE:	24 VDC (standard). Requires power supply. Optional Integrated power supply - Universal 100 - 277VAC with standard 24VDC output	FINISH:	Black - Hard Anodized or Anodized Aluminum Alloy. (exterior)
COLOR TEMP:	Warm White 3000K / Neutral White 4000K / Cool White 5000K / RGB	WEIGHT:	9 lbs.
		WARRANTY:	5 Year Limited Parts

CERTIFICATIONS



ORDERING LOGIC (EXAMPLE: FS-MAX - 24 - RGB - 12- DMX - IG - B)

MODEL	VOLTAGE	COLOR TEMP	BEAM ANGLE	DIMMING	MOUNTING	FINISH	ACCESSORIES
FS-MAX -	-	-	-	-	-	-	<input type="checkbox"/> Mounting Bucket
Flood / Spot Light Fixture	*24 24VDC †U 100-277 VAC Universal Power Supply	WW 3000K NW 4000K CW 5000K	12 12° 50 50° 120 120° **C Custom	N None DMX DMX (Opt)	IG In-grade*** (Std) Y Yoke Mount	B Black	
		RGB RGB w/DMX option only	30 30° RGB only				

* Requires external converting power supply
 † Internal Integrated Power Supply
 ** Custom 12° to 30° wall wash
 *** Mounting Bucket not included