

PROJECT:

TYPE:

QUANTITY:

AGENT:

DATE:

Rev: 120310

Copyright © 2010 Affineon Lighting


FS-MINI

IP67



FS-MINI - PUCK MOUNT SHOWN
OTHER MOUNTING OPTIONS AVAILABLE

TOP VIEW

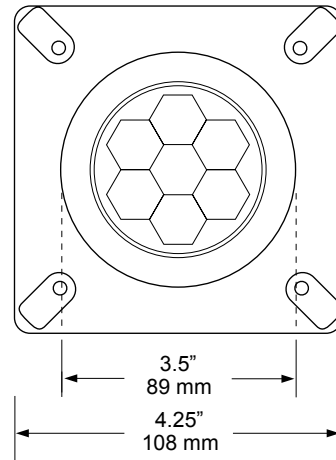

DESCRIPTION

Affineon's 24VDC FS-MINI fixture is designed for retrofit or new construction with optional mounting systems. With a conspicuous beam up to 50 feet, and an IP rating of 67 it is ideally suited for interior or exterior applications such as landscape and architectural uplighting. Constructed from anodized aluminum alloy and stainless steel hardware, this extremely durable, completely sealed fixture with hail resistant borofloat glass offers high quality illumination in a stylized design that utilizes high efficiency, long life LED technology at the highest performance and reliability levels available. Affineon's FS MINI series has a simple design that allows for easy installation.

SPECIFICATIONS

MATERIALS: Anodized aluminum body. Borofloat glass lens cover. Stainless steel hardware.

LAMP LIFE: 70% lumen maintenance at 60,000 hours, 25C

IP RATING: IP67

POWER: White 7.2W / RGB 3.6W

VOLTAGE: 24VDC. Separate power supply required (not included)

COLOR TEMP: Warm White 3000K / Neutral White 4000K / Cool White 5000K / 90+ CRI Warm White 3000K / RGB

BEAM ANGLES: 12° / 50° / 120° / RGB 30° only

DIMMING: Optional DMX dimmable interface available

DIMENSIONS: 4.25" x 4.25" x 2.8" deep

MOUNTING: Puck, Yoke & Base or Post Mount

FINISH: Silver Anodized Aluminum Alloy (Std)
Optional finishes available

WEIGHT: 3 lbs.

WARRANTY: 5 Year Limited Parts

CERTIFICATIONS



ORDERING LOGIC (EXAMPLE: FS-MINI - 24 - RGB - 30 - RGBDMX - PK - S)

MODEL	VOLTAGE	COLOR TEMP	BEAM ANGLE	DIMMING	MOUNTING	FINISH
FS-MINI	24					
Mini Flood/Spot Light Fixture	24VDC*	WW 3000K NW 4000K CW 5000K SP3 90+CRI 3000K <hr/> RGB RGB with DMX option only	10 10° 50 50° 120 120° <hr/> 30 30° RGB only	N None WDMX On board DMX dimming <hr/> RGBDMX On board DMX RGB dimming / control	PK Puck Mount YB Yoke+Base PO Post	S Silver B Black HB Hard Ano Black HT Hard Ano Titanium

* Separate power supply required